



Network Video Recorder



64Ch Standalone Megapixel NVR

TC-SNVR64HD


Features :

Can connect IP camera, IP speed dome camera and DVS; support Onvif protocol;
Compatible with main brand IP cameras: TCSS, AXIS, SONY, Panasonic,
SANYO, BOSCH, SAMSUNG, Honeywell, VIVOTEK, HIKVISION, DAHUA,
Histream, Grandstream, TOPSEE, Launch, WISION, HYVISION, WAPA etc.;

Support megapixel HD network video preview, storage and playback;
Click any area and zoom in or zoom out on the image by mouse;
Support digital zooming under preview and playback modes;
Support search, playback and backup by event;
Support 4ch playback simultaneously.

1. Support P2P cloud service, including cloud connecting, cloud monitoring, cloud transmitting to access IPC and NVR at any time, and any place.
2. Support Onvif protocol, support High profile S, High profile G, compatible with different IP camera that based on Onvif, RTSP standard.
3. Support megapixel HD network video preview, storage and playback.
4. Support search, playback and backup by event.
5. Any 16ch 960P playback, 9ch 1080P, 4ch 3MP/5MP playback simultaneously.
6. Support monitor PTZ on preview mode.
7. Offer CMS for free.

64Ch Standalone Megapixel NVR

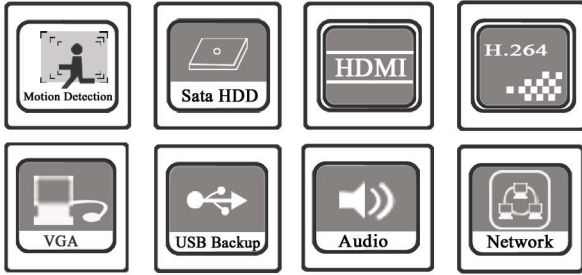

Specifications

Model	TC-SNVR64HD
Operating System	Embedded LINUX operating system
Image Code Control	Image code quality adjustable, variable bitstream & constant bitstream optional
Dual Stream	Each channel can set main stream and substream
Video Standard	1080P(1920x1080)30fps/960P(1280x960)/720P(1280x720)30fps
Monitoring Image Quality	1080P(1920x1080)/960P(1280x960)/720P(1280x720)
Image Motion Detection	Each screen can set multiple detection areas & set 6-level sensitivity
Recording Playback Quality	Any 16ch 960P playback, 9ch 1080P, 4ch 3MP/5MP playback simultaneously
Region Cover	Every channel can set 4 cover regions (IPC Support)
Recording Mode	Support manual, auto, motion detection, alarm trigger record mode.
Backup Way	Support U disk, USB mobile HDD, USB DVD-RW network storage and backup
Operation Way	Mouse
Local Login	User name and password
Recording Storage	Local HDD network
Video	64×(1280*960) +sub[960*576]+4Ref.+9Play 49×(1920*1080)+sub[960*576]+4Ref.+9Play 36×(1920*1080)+sub[960*576]+4Ref.+4Play 25×(2048*1536)+sub[960*576]+4Ref.+4Play 16×(2592*1944)+sub[960*576]+4Ref.+1Play
Audio Input	64/36ch network audio input
Video Output	1ch VGA+1ch HDMI
Audio Output	1ch RCA output
Network Port	2 RJ45, 10M/100M/1000M self-adaptive LAN port
USB Port	1×USB 3.0, 2×USB 2.0 ports
Wireless Port	WIFI
HDD Port	9×SATA+1×E-SATA HDD Port
MAX Capacity	Each port supports MAX 4TB HDD
RS485 Port	Full duplex standard 485 port.
Mobile Surveillance	Support (iPhone, Windows Mobile, BlackBerry, Symbian, Android) smart phone
Power Supply	ATX110-220V 250W 50-60Hz
Power Consumption	≤ 30W (without HDD)
Working Temperature	-10°C ~ + 55°C,
Working Humidity	10% - 90%
Dimension	Equipment: 440mm×432mm×90mm, Packing: 539mm×550mm×225mm
Weight(without HDD)	N.W.: 7.4Kg; With Package: 9.8Kg
Outside Carton	2 pcs/carton. 555mm×545mm×470mm; Weight: 21Kg
Installation Way	Desktop Installation



Rear Panel